


TSF Series LED Track Light

High CRI / Full Spectrum / Fixed CCT



CRI	90 or Above
Spectrum	Full Spectrum, No UV
Beam Angle	44° Flood (Lenses Sold Separately)
Efficacy	50 Lumens per Watt
Input Voltage	Universal 100-240V AV / 50-60 Hz
Dimming	Manual Knob / 100% to 20%, and Off
Thermal	Passive Cooling
Operating Temp	0 to 40°C
Dimensions / Weight	7.6" x 6.2" x 7.3" / 3 lbs
Material	Aluminum Housing / Aluminum Bracket
Rotation / Tilt	330° / ± 145° (from Vertical Down)
Accessory Mounting	Thumb Screw
LED Source	DiCon's Multi-Chip Dense Matrix LED
Expected Life	50,000 Hours / 70% Lumen Maintenance
Warranty	5 Years
Standards	Tested to LM79 and LM80 Protocols

OPTICAL SPECTRUM

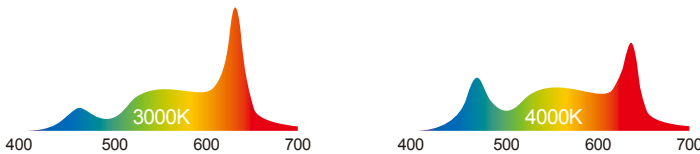

CRI Measurement	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	CRI Ra	CRI Extended
3000K	92	99	84	92	96	98	93	86	76	90	91	83	95	88	91	92	90
4000K	98	99	92	95	95	95	96	94	88	92	94	69	99	94	94	96	93

*Values in this table are typical


ORDERING GUIDE

TSF	25	-		-		-		-	WFD	-	M	-	U
Model	Finish	Track	CCT	Beam Angle	Control	Voltage							
25 25W	BK Black WT White	TEK TEK ECO ECO	3000 3000K 3500 3500K 4000 4000K	WFD Wide	M Manual	U 110-240V							

1. Refer to Mechanical Figures for track adapter info



Example: TSF25-BK-TEK-4000-WFD-M-U

MECHANICAL FIGURES

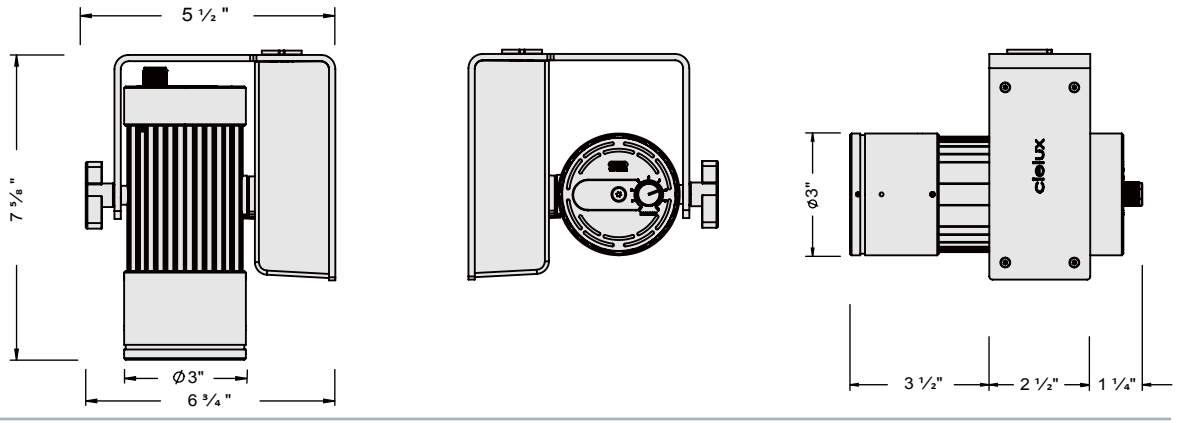


Global TEK - 2 Circuit Track

Global ECO - Halo Track

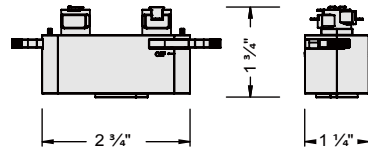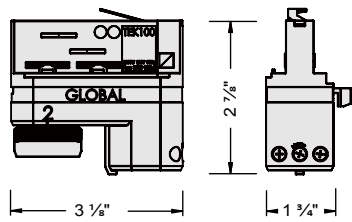

PHOTOMETRIC DATA



- A** Aiming Angle
- C** Distance to Center of Beam (ft)
- CBCP** Center Beam Candle Power
- D** Distance (ft)
- FC** Footcandles (fc)
- L** Beam Length (ft)
- W** Beam Width (ft)

Fixed 3000K	Beam Angle	CBCP	A=0°				A=30°					A=45°					A=60°				
			D	FC*	L	W	D	C	FC*	L	W	D	C	FC*	L	W	D	C	FC*	L	W
Wide Flood	42°	1550	2.5	245	1.7	1.7	2.5	1.2	194	2.1	1.9	2.0	1.5	221	2.1	1.7	1.5	1.6	243	2.4	1.6
			4.0	96	2.7	2.7	3.5	1.6	99	2.9	2.6	3.0	2.3	98	3.2	2.6	2.5	2.7	88	4.0	2.7
			5.5	51	3.8	3.8	5.0	2.3	49	4.2	3.8	4.0	3.0	55	4.2	3.4	3.5	3.8	45	5.6	3.8
			7.0	31	4.8	4.8	6.0	2.8	34	5.0	4.5	5.0	3.8	35	5.3	4.3	4.0	4.4	34	6.4	4.3
Flood**	36°	2100	3.0	234	1.7	1.7	3.0	1.5	182	2.3	2.0	2.5	2.0	188	2.4	1.9	2.0	2.4	177	2.8	1.9
			4.5	103	2.6	2.6	4.0	2.0	102	3.0	2.7	3.5	2.7	96	3.3	2.7	2.5	2.9	113	3.5	2.3
			6.0	58	3.5	3.5	5.5	2.7	54	4.1	3.7	4.5	3.5	58	4.3	3.5	3.5	4.1	58	5.0	3.3
			8.0	33	4.7	4.7	7.0	3.4	38	5.3	4.7	6.0	4.7	33	5.7	4.6	4.5	5.3	35	6.4	4.2

*Multiply by 1.07 for 3500K and 4000K **With 3" Fresnel Lens (Optional Accessory)

OPTIONAL ACCESSORIES



ABD3
Barndoor
3"



AFS3
Fresnel Lens
3" (Screwed)