

PROJECT		QUANTITY	
---------	--	----------	--

P3F Fresnel Light (Track)

90W LED/ 15°- 45°



ORDERING GUIDE

CXP3F - - - - **PSP** -

Mode

- CLR** All Modes
- EZ** All EZ Modes
- RGB** RGB Mode Only
- CCT** Tunable CCT Mode Only
- 3200** Fixed 3200K
- 5600** Fixed 5600K

Finish

- WH** White
- BK** Black

Mount

- TOX** w/ O-type DMX Track Adapter
- TEX** w/ E-type DMX Track Adapter (Legacy product)

Power Supply & Control

- PSP** Power Supply w/ Pass-Through DMX

Plug/Connection

- US** US 120V
- EU** EU 220V

SPECIFICATIONS

Beam Angle	15°- 45°
CRI / TLCI	95/90 typical (in CCT Mode of 2800K-6500K)
Dimming	100% - 0% flicker free
AC Power Draw	90W max
AC Input	100 - 240V AC, 50 - 60Hz
Remote Control	DMX 512
Cooling	Fan Cooled
Acoustic Noise	19 dBA (Auto Mode)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	4.5lb / 2.1kg



- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Compact (< 8" of Vertical Space)

MECHANICAL FIGURES





PSP

US

Flood

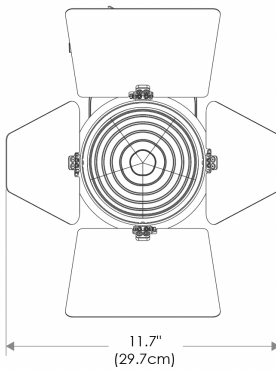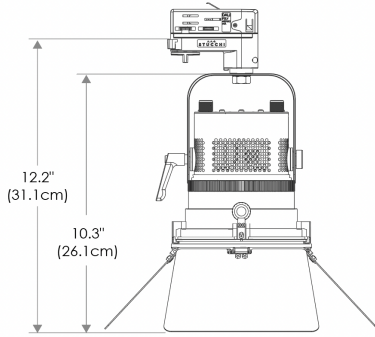



Focus

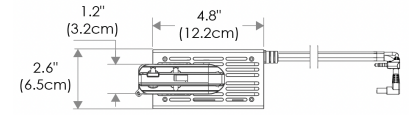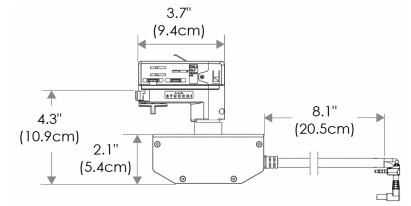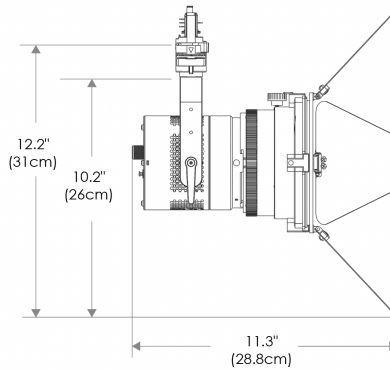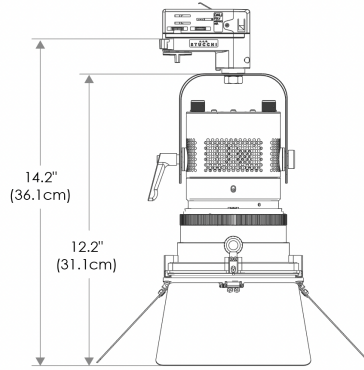





PSP

EU

Flood

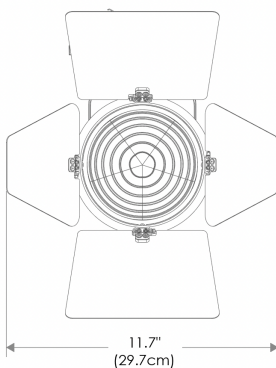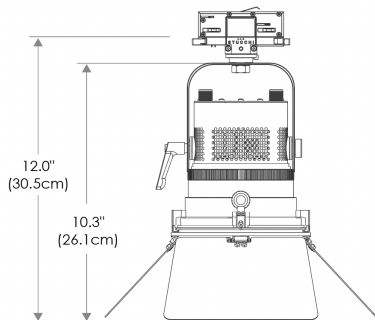


Focus

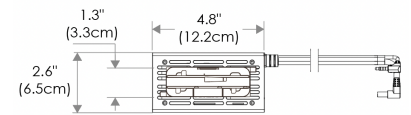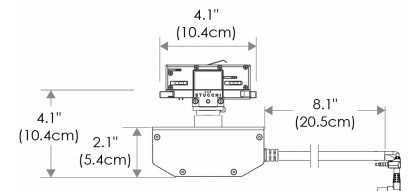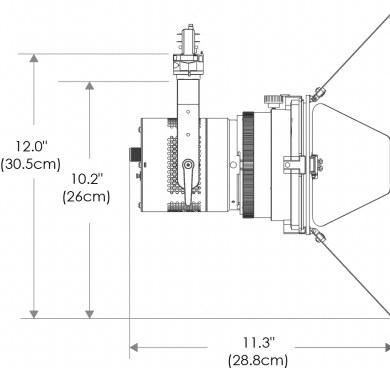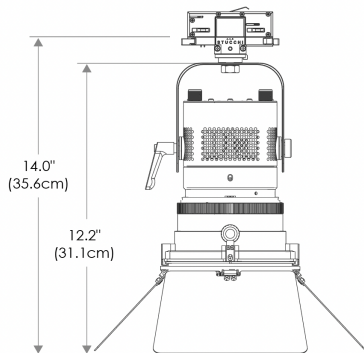


PHOTOMETRIC DATA


Focus




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	2604	241	117
	lux	28027	2591	1257
@5600K	fc	2690	249	121
	lux	28960	2678	1299
Beam Diameter		Ø 0.8' (~0.2m)	Ø 2.6' (~0.8m)	Ø 4.1' (~1.2m)

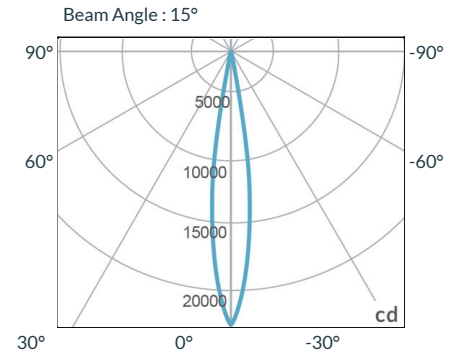

Flood



Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	546	54	29
	lux	5876	578	314
@5600K	fc	564	55	30
	lux	6071	597	324
Beam Diameter		Ø 2.2' (~0.7m)	Ø 7.4' (~2.3m)	Ø 11.4' (~3.5m)

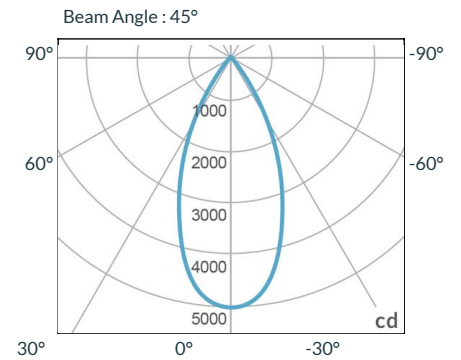

ACCESSORIES

(specify finish by adding -BK or -WH)



6x8 Softbox
FLXP3-6x8SB