

# P3L Ellipsoidal Light (Clamp)

90W LED/ 19° / 26° / 36° / 50°



## ORDERING GUIDE

**CXP3L** -  -  -  - **CLP** - **PSV** -

### Beam Angle

**19** 19°  
**26** 26°  
**36** 36°  
**50** 50°

### Mode

**CLR** All Modes  
**EZ** All EZ Modes  
**RGB** RGB Mode Only  
**CCT** Tunable CCT Mode Only  
**3200** Fixed 3200K  
**5600** Fixed 5600K

### Finish

**WH** White  
**BK** Black

### Mount

**CLP** Clamp Mount

### Power Supply & Control

**PSV** Power Supply

### Plug/Connection


**US** US 120V  
**EU** EU 220V

## SPECIFICATIONS


Beam Angle	19° / 26° / 36° / 50°
CRI / TLCI	95/90 typical (in CCT Mode of 2800K-6500K)
Dimming	100% - 0% flicker free
AC Power Draw	90W max
AC Input	100 - 240V AC, 50 - 60Hz
Remote Control	DMX 512
Cooling	Fan Cooled
Acoustic Noise	19 dBA (Auto Mode)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	8.1lb / 3.7kg
Gobo Size	Diameter: M Size (66mm)
	Max Image: 48mm
	Max Thickness: 1mm

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Carries Four Shutter Blades

## MECHANICAL FIGURES

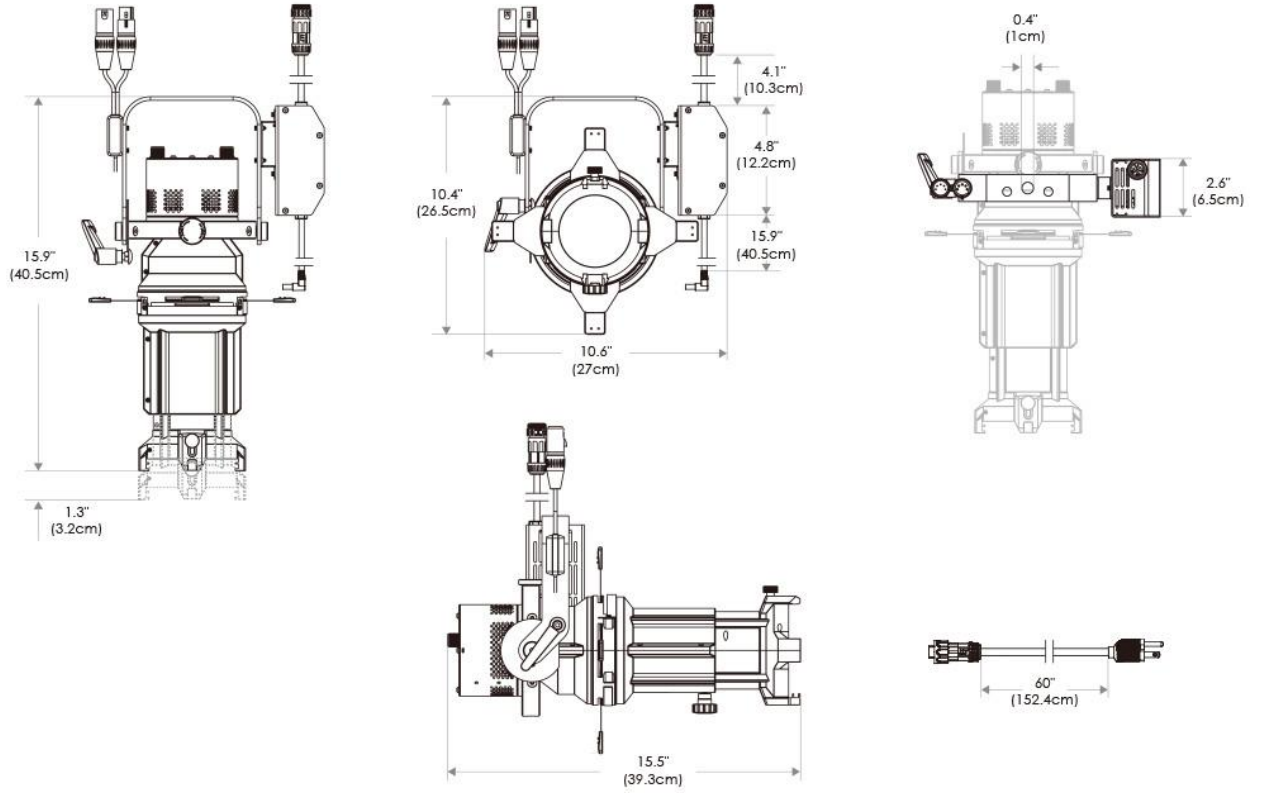


## TILT/ROTATION

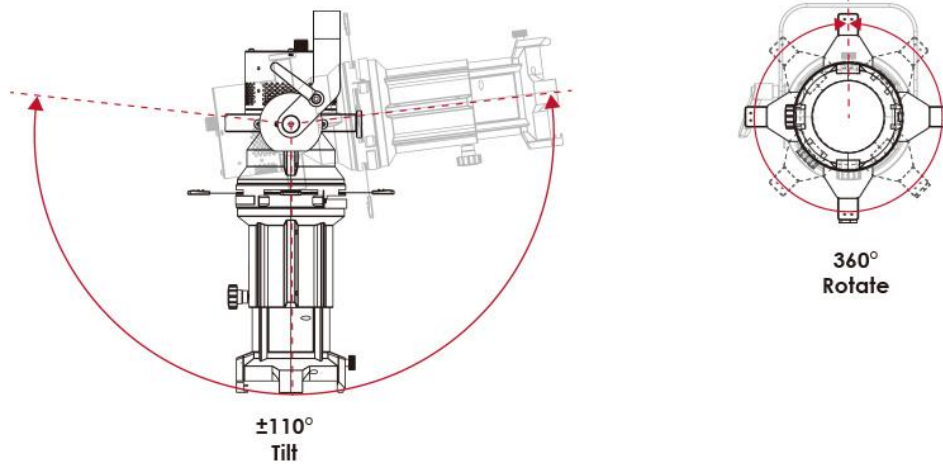


## PHOTOMETRIC DATA


### 19 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	2202	174	83
	lux	23702	1873	894
@5600K	fc	2239	177	84
	lux	24101	1906	905
Beam Diameter		Ø 0.9' (~0.3m)	Ø 3.0' (~0.9m)	Ø 4.6' (~1.4m)

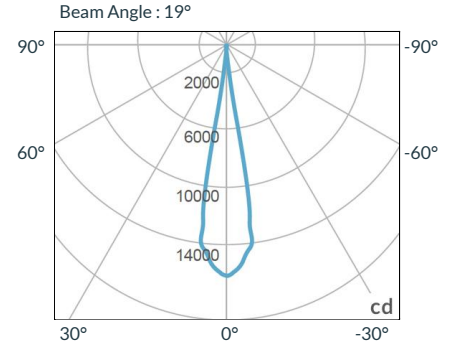


### 26 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	1978	160	77
	lux	21292	1726	831
@5600K	fc	2079	169	81
	lux	22379	1814	873
Beam Diameter		Ø 1.2' (~0.4m)	Ø 4.0' (~1.2m)	Ø 5.9' (~1.8m)

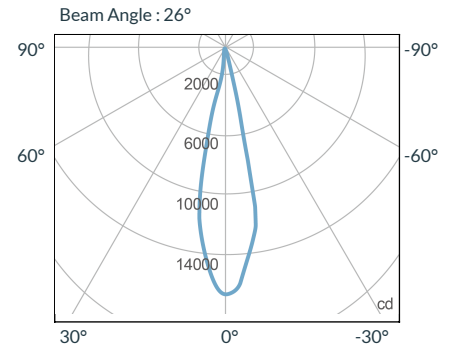


### 36 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	743	60	29
	lux	7998	646	313
@5600K	fc	820	67	32
	lux	8827	722	345
Beam Diameter		Ø 1.7' (~0.5m)	Ø 5.6' (~1.7m)	Ø 8.2' (~2.5m)

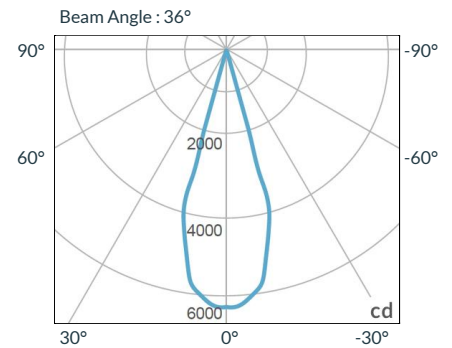

### 50 Degree



Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	269	22	11
	lux	2896	237	119
@5600K	fc	285	23	11
	lux	3068	248	119
Beam Diameter		Ø 2.3' (~0.7m)	Ø 7.7' (~2.4m)	Ø 11.7' (~3.6m)

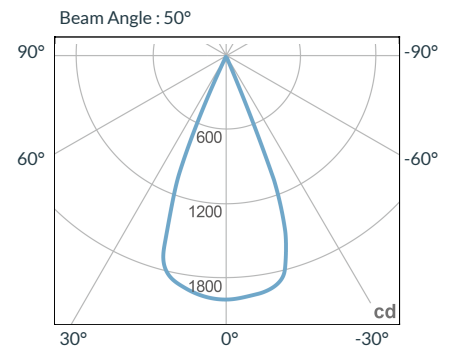

## ACCESSORIES

(specify finish by adding -BK or -WH)



Leko Gobo Holder  
FLXP3L-GOBOHOLDER



Leko Gobo Set of 4  
FLXP3L-GOBOSET



Leko Iris  
FLXP3L-IRIS



Leko Gel Holder  
FLXP3L-GELHOLDER



DMX 6 Channel Controller  
FLXCNTL-DMX6