


P5F Fresnel Light (Clamp)

175W LED/ 12°- 55°

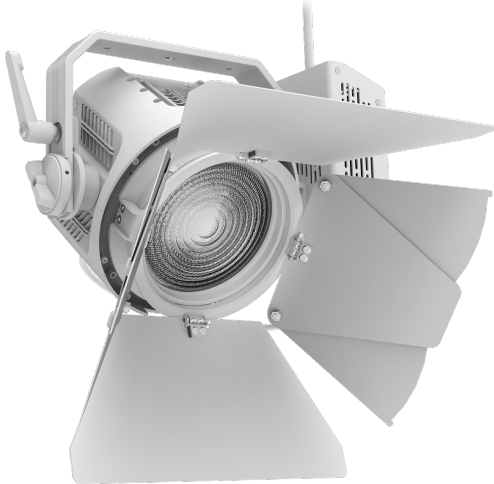

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 175W Power Draw
- Compact (< 12" of Vertical Space)

ORDERING GUIDE

CXP5F - - - **CLP** - **PSV** -

Mode

CLR All Modes
EZ All EZ Modes
RGB RGB Mode Only
CCT Tunable CCT Mode Only
3200 Fixed 3200K
5600 Fixed 5600K

Finish

WH White
BK Black

Mount

CLP Clamp Mount

Power Supply & Control

PSV Power Supply


Plug/Connection

US US 120V
EU EU 220V

SPECIFICATIONS


| | |
|------------------------------------|---|
| Beam Angle | 12°- 55° |
| CRI / TLCI | 95/90 typical (in CCT Mode of 2800K-6500K) |
| Dimming | 100% - 0% flicker free |
| AC Power Draw | 175W max |
| AC Input | 100 - 240V AC, 50 - 60Hz |
| Remote Control | DMX 512 |
| Cooling | Fan Cooled |
| Acoustic Noise | 23 dBA (Auto Mode) |
| Operating Temp. | 32 - 104°F (0 - 40°C) |
| Weight (Fixture + Power Supply) | 9.6lb / 4.4kg |

MECHANICAL FIGURES

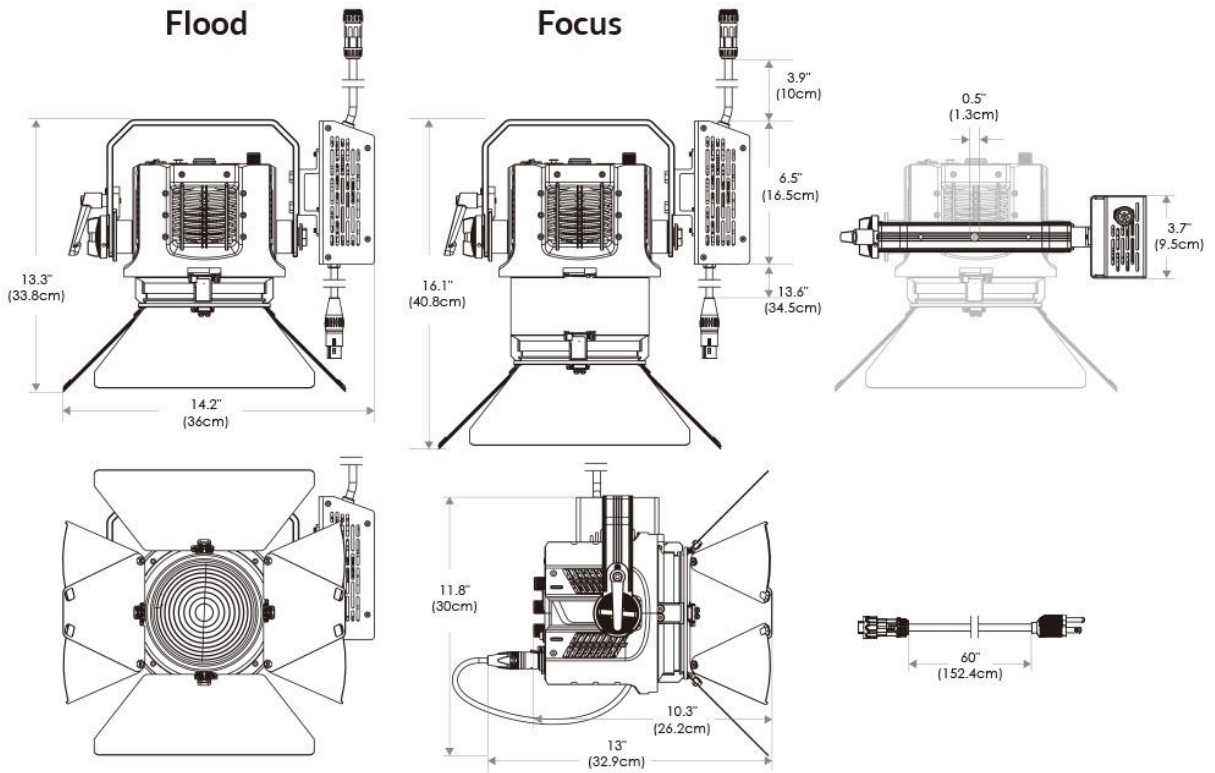


PHOTOMETRIC DATA

Focus




| Distance | | 3' (~0.9 m) | 10' (~3.0 m) | 15' (~4.6 m) |
|---------------|-----|-------------------|-------------------|-------------------|
| @3200K | fc | 3150 | 359 | 128 |
| | lux | 33907 | 3865 | 1378 |
| @5600K | fc | 3296 | 376 | 134 |
| | lux | 35478 | 4048 | 1443 |
| Beam Diameter | | Ø 0.7' (~0.2m) | Ø 2.1' (~0.6m) | Ø 3.5' (~1.1m) |

Beam Angle : 12°

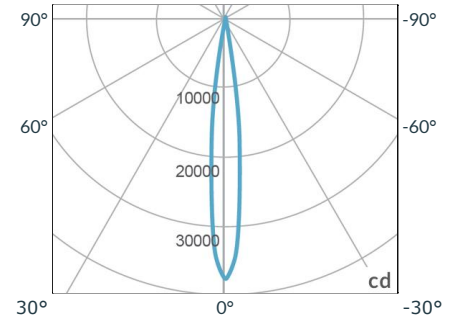


Flood



| Distance | | 3' (~0.9 m) | 10' (~3.0 m) | 15' (~4.6 m) |
|---------------|-----|-------------------|-------------------|--------------------|
| @3200K | fc | 385 | 45 | 17 |
| | lux | 4145 | 485 | 183 |
| @5600K | fc | 406 | 47 | 18 |
| | lux | 4371 | 506 | 194 |
| Beam Diameter | | Ø 0.9' (~0.6m) | Ø 8.6' (~2.6m) | Ø 14.4' (~4.4m) |

Beam Angle : 55°

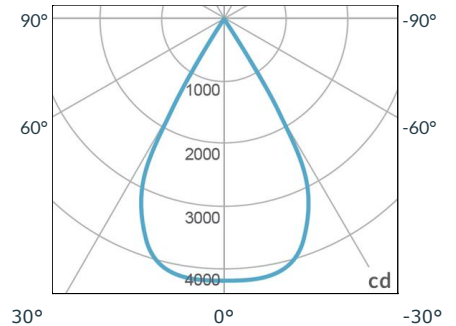

ACCESSORIES

(specify finish by adding -BK or -WH)



**DMX 6 Channel Controller
FLXCNTL-DMX6**