

PROJECT

QUANTITY

# P5L Ellipsoidal Light (Track)

175W LED/ 19° / 26° / 36° / 50°

## ORDERING GUIDE

**CXP5L** -  -  -  -  - **PSP** -



<b>Beam Angle</b>	
<b>19</b>	19°
<b>26</b>	26°
<b>36</b>	36°
<b>50</b>	50°
<b>Mode</b>	
<b>CLR</b>	All Modes
<b>EZ</b>	All EZ Modes
<b>RGB</b>	RGB Mode Only
<b>CCT</b>	Tunable CCT Mode Only
<b>3200</b>	Fixed 3200K
<b>5600</b>	Fixed 5600K
<b>Finish</b>	
<b>WH</b>	White
<b>BK</b>	Black
<b>Mount</b>	
<b>TOX</b>	w/ O-type DMX Track Adapter
<b>TEX</b>	w/ E-type DMX Track Adapter (Legacy product)
<b>Power Supply &amp; Control</b>	
<b>PSP</b>	Power Supply w/ Pass-Through DMX
<b>Plug/Connection</b>	
<b>US</b>	US 120V
<b>EU</b>	EU 220V


## SPECIFICATIONS

Beam Angle	19° / 26° / 36° / 50°
CRI / TLCI	95/90 typical (in CCT Mode of 2800K-6500K)
Dimming	100% - 0% flicker free
AC Power Draw	175W max
AC Input	100 - 240V AC, 50 - 60Hz
Remote Control	DMX 512
Cooling	Fan Cooled
Acoustic Noise	23 dBA (Auto Mode)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	10.9lb / 5.0kg
Gobo Size	Diameter: M Size (66mm)
	Max Image: 48mm
	Max Thickness: 1mm


- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 175W Power Draw
- Carries Four Shutter Blades

**MECHANICAL FIGURES**


PSP **US**

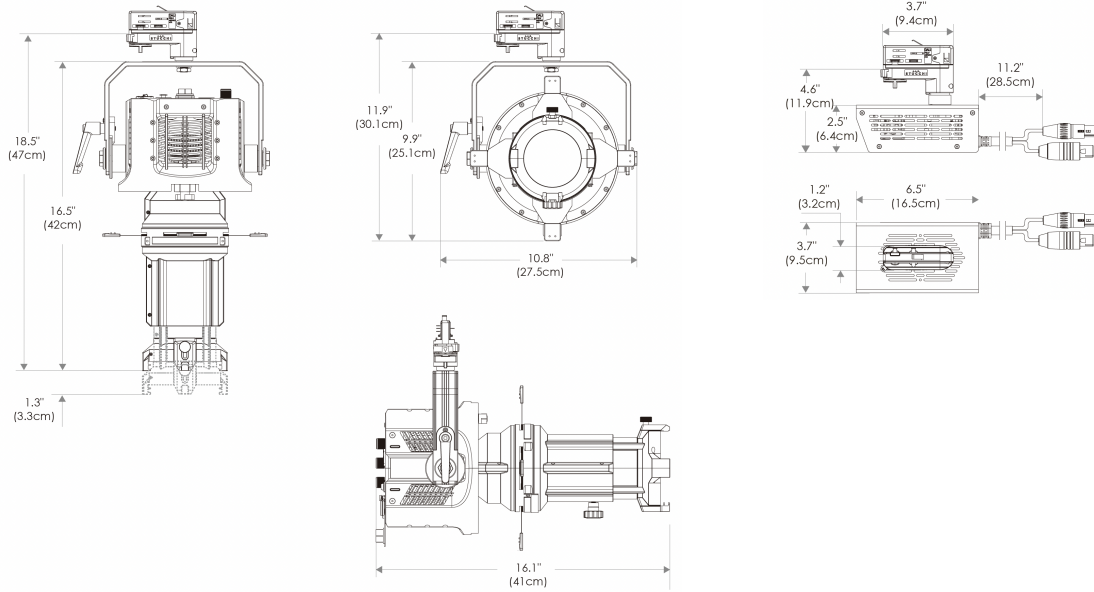

PSP **EU**

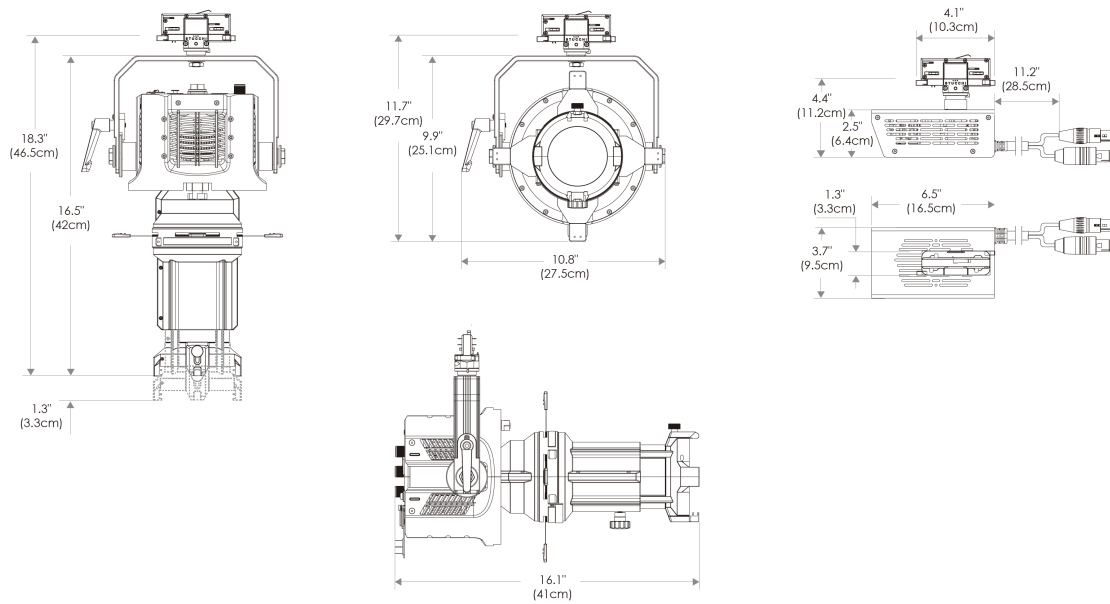


**TILT/ROTATION**

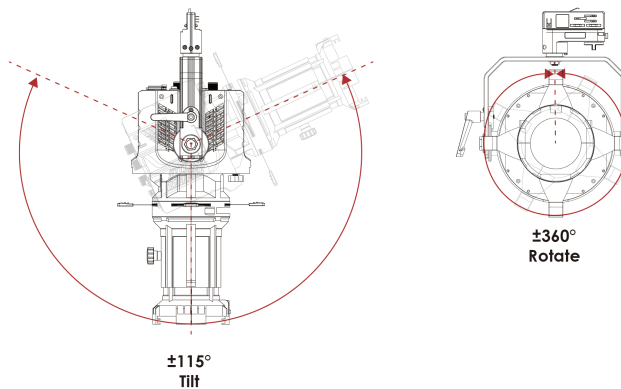


## PHOTOMETRIC DATA


### 19 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	4771	374	175
	lux	51355	4026	1884
@5600K	fc	5001	392	183
	lux	53831	4220	1970
Beam Diameter		Ø 0.9' (~0.3m)	Ø 3.0' (~0.9m)	Ø 4.6' (~1.4m)

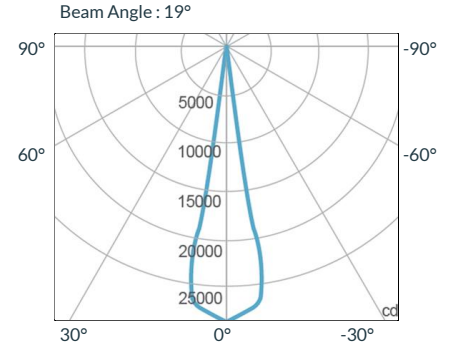


### 26 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	2687	226	104
	lux	28922	2432	1120
@5600K	fc	2951	243	113
	lux	31779	2615	1220
Beam Diameter		Ø 1.2' (~0.4m)	Ø 4.0' (~1.2m)	Ø 6.2' (~1.9m)

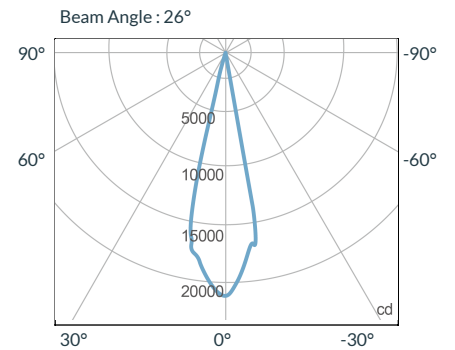


### 36 Degree




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	1619	131	61
	lux	17427	1411	657
@5600K	fc	1715	139	65
	lux	18461	1497	700
Beam Diameter		Ø 1.7' (~0.5m)	Ø 5.8' (~1.8m)	Ø 8.9' (~2.7m)

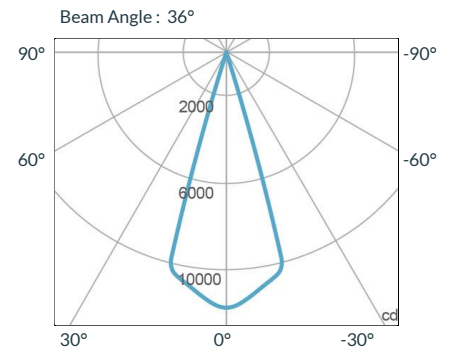

### 50 Degree



Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	591	50	24
	lux	6362	539	259
@5600K	fc	632	53	25
	lux	6803	571	270
Beam Diameter		Ø 1.9' (~0.6m)	Ø 6.3' (~1.9m)	Ø 9.6' (~2.9m)

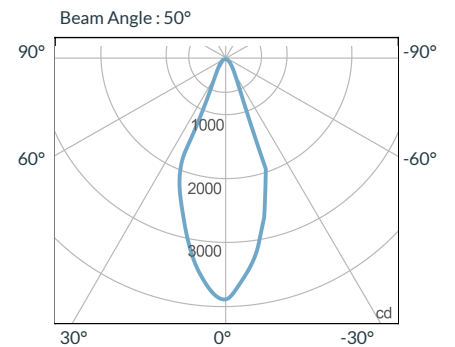


## ACCESSORIES

(specify finish by adding -BK or -WH)



Leko Gobo Holder  
FLXP5L-GOBOHOLDER



Leko Gobo Set of 4  
FLXP5L-GOBOSET



Leko Iris  
FLXP5L-IRIS



Leko Gel Holder  
FLXP5L-GELHOLDER



DMX 6 Channel Controller  
FLXCNTL-DMX6